

A low profile duct system for restricted ceiling spaces

- > Low profile modular design
- > Quick and easy to install
- > BCA compliant




The **FlatPack** System is ideal for buildings such as apartments and hotels that have been designed with low ceiling heights. The system's smooth inner surface minimises pressure loss, while its easy-to-fit components make it quick to install.



A low profile, easy to install modular system

The FlatPack Low Profile Duct System is the ideal alternative to 150mm round PVC pipe commonly used in ventilation systems for apartments, hotels and wherever space is limited. Where air flow allows, the system is also a cost effective alternative to sheet metal ducting.

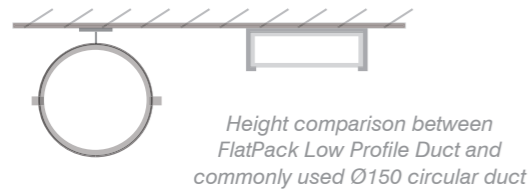

Today's architects and builders strive to achieve living and work spaces that make the most of a building's interior while being more cost effective and energy efficient. In order to achieve this, building designers are minimising the inner ceiling space and therefore reducing the space for installers to run the building's services.

The FlatPack system's low profile design makes it ideal for these space restricted applications. The system fits together tightly and features a smooth inner surface which minimises pressure loss and therefore improves air flow. In some applications a less powerful fan may be possible.

Typical installation in a restricted space



Quick and easy to install

The modular, slide-together design of the FlatPack system makes it easy for an installer to put in, and its PVC construction allows the duct to be cut down to size so it can fit into virtually any space. The system also features a specially designed mounting bracket which makes the system convenient to hang.



Complies to BCA

The high quality FlatPack system is manufactured from self-extinguishing PVC, so the components are light weight, corrosion-free and hygienic. It complies with the requirements of the Building Code of Australia Volume One which references AS4254-1995.




FlatPack range

There are two sizes of FlatPack ducting available, the 204 series and the 150 series.


The **204 series** measures 204mm wide x 60mm high and is suitable for most air exhaust applications in apartments and hotel rooms.

The **150 series** can handle higher air volumes and measures 180mm wide x 95mm high.

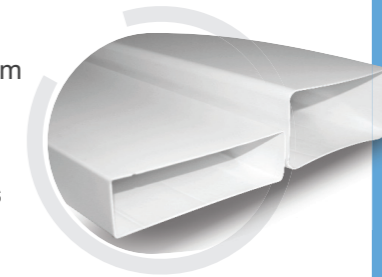

Flat Rigid Duct


204 series
2 metre long
FP2-SDUCT-2



150 series
2 metre long
FP2-SDUCT-2-150

Duct Connector


204 series
FP2-CON



150 series
FP2-CON-150

90° Horizontal Bend


204 series
FP2-HORIZBEND-90



150 series
FP2-HORIZBEND-90-150


45° Horizontal Bend

204 series
FP2-HORIZBEND-45



90° Vertical Bend


204 series
FP2-VERTBEND-90



150 series
FP2-VERTBEND-90-150


45° Vertical Bend

204 series
FP2-VERTBEND-45




Equal T Piece

204 series
FP2-TPIECE



Flexible Bend


204 series
FP2-FLEXBEND



150 series
FP2-FLEXBEND-150

Round/Rectangular Adapter


204 series
Use with
FP2-RED150-125
for Ø150mm duct
FP2-125R-RECT
(Ø125mm)



150 series
FP2-150R-RECT
(Ø150mm)

Circular Reducer/Expander

Ø150mm to Ø125mm
FP2-RED150-125




Ø125mm to Ø100mm
FP2-RED125-100

Ø150mm to Ø100mm
FP2-RED150-100


Rotating Elbow Bend

204 series
150mm
FP2-REBEND-150




Fixed Elbow Bend

150 series
150mm
FP2-REBEND-150-150



Wall Plate

204 series
FP2-WPR



150 series
FP2-WPR-150

Versatile and easy to install

Adelaide's Commercial Air Services is saving time and money with the FlatPack low profile duct system.

Commercial Air's Project Manager Jarred Collins has been impressed with the versatility of the FlatPack system and the speed of installation.

"We provide mechanical services for a lot of apartment projects and had been using sheet metal ductwork, but it required a lot of time to tailor make the sheet metal and crimp each piece together," he said.

"In contrast FlatPack is pretty quick to install," he said.

"It's just like putting PVC downpipes together, only simpler.


The components push together to give a nice tight seal, and if there's an obstacle in the way, you simply cut the piece short, put a connection in and keep on going."

He estimates the FlatPack system was about 30% quicker to install and about half the cost that sheet metal ducting would have been. "That's a considerable saving to both the contractor and client, so we will continue to use the FlatPack system where air flow requirements permit," he said.




Flat Channel Clip

204 series
FP2-CLIP





150 series
FP2-CLIP-150

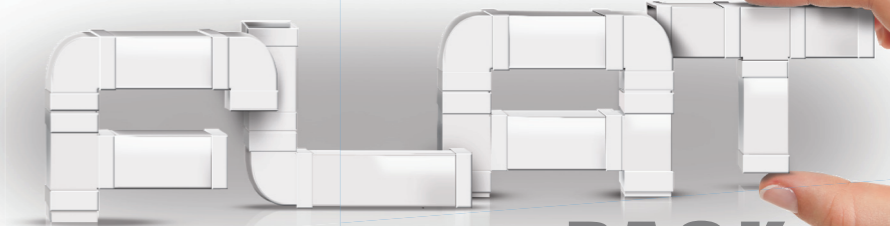

PACK

Performance data

Component	Description	Pressure Loss, Pa			
		30L/s	60L/s	90L/s	120L/s
204 Series					
FP2-SDUCT-2	Flat Rigid Duct (Losses are per metre)	4	14	31	53
FP2-CON	Duct connector	0	1	2	3
FP2-HORIZBEND-45	45° Horizontal Bend	3	13	35	72
FP2-VERTBEND-45	45° Vertical Bend	3	13	30	53
FP2-HORIZBEND-90°	90° Horizontal Bend	7	31	70	126
FP2-VERTBEND-90	90° Vertical Bend	1	4	7	11
FP2-REBEND-150	Rotating Elbow Bend 90° Rectangular / Round Ø150	6	23	53	94
FP2-125R-RECT	Round / Rectangular Adapter	4	15	35	62
FP2-RED125-100	Circular Reducer / Expander Ø125 to Ø100	6	24	46	73
FP2-RED150-125	Circular Reducer / Expander Ø150 to Ø125	2	9	28	48
FP2-RED150-100	Circular Reducer / Expander Ø150 to Ø100	8	31	64	103
FP2-TPIECE	 Supply Air - 50% air in each branch	N/A	N/A	N/A	N/A
	 Exhaust Air - 50% air in each branch	N/A	N/A	N/A	N/A
150 Series					
FP2-SDUCT-2-150	2m Flat Rigid Duct	1	4	8	13
FP2-CON-150	Duct connector	0	1	2	4
FP2-HORIZBEND-90-150	Horizontal Bend 90°	3	9	20	34
FP2-VERTBEND-90-150	Vertical Bend 90°	5	18	40	71
FP2-RED150-100	Circular Reducer / Expander Ø150 to Ø100	8	31	64	103
FP2-REBEND-150-150	Elbow Bend 90° Rectangular / Round Ø150	7	30	68	121
FP2-150R-RECT	150mm Round / Rectangular Adapter	1	4	8	15
Accessories					
PFL150	Plastic Louvre - Ø150 spigot complete with fly wire	10	24	60	110
PGL150	Plastic Gravity Louvre - Ø150 spigot	5	9	35	65
SJK150	Smooth Flow Backdraft Damper - Ø150	1	2	3	4

* Lower pressure loss at higher airflows can be achieved by using 2 x 45° bend with a 50mm spacer, see FP2-HORIZBEND-45

Complemented by an extensive Fantech range

The problem of restricted ceiling spaces can be overcome with the Fantech FlatPack Low Profile Duct System. This system is perfectly complemented by an extensive range of Fantech fans, grilles and the Smooth Flow backdraft damper. Please refer to the Fans by Fantech catalogue, CD Product Selection Program or the Fantech website for the full list of features and performance data of these products.



www.fantech.com.au

For sales enquiries contact:



Fantech Pty. Ltd.

Victoria: (+61 3) 9554 7845
 New South Wales: (02) 8811 0400
 South Australia: (08) 8294 0530
 Northern Territory: (08) 8947 0447
 Queensland: (07) 3299 9888
 Western Australia: (08) 9209 4999
 A.C.T.: (02) 6280 5511
 New Zealand: (09) 444 6266
 South East Asia: (+603) 5121 4453

Specifications and design subject to change without notice.

FAN0081 08/14